




Huawei P9 Earpiece Speaker Replacement

Written By: Dominik Schnabelrauch



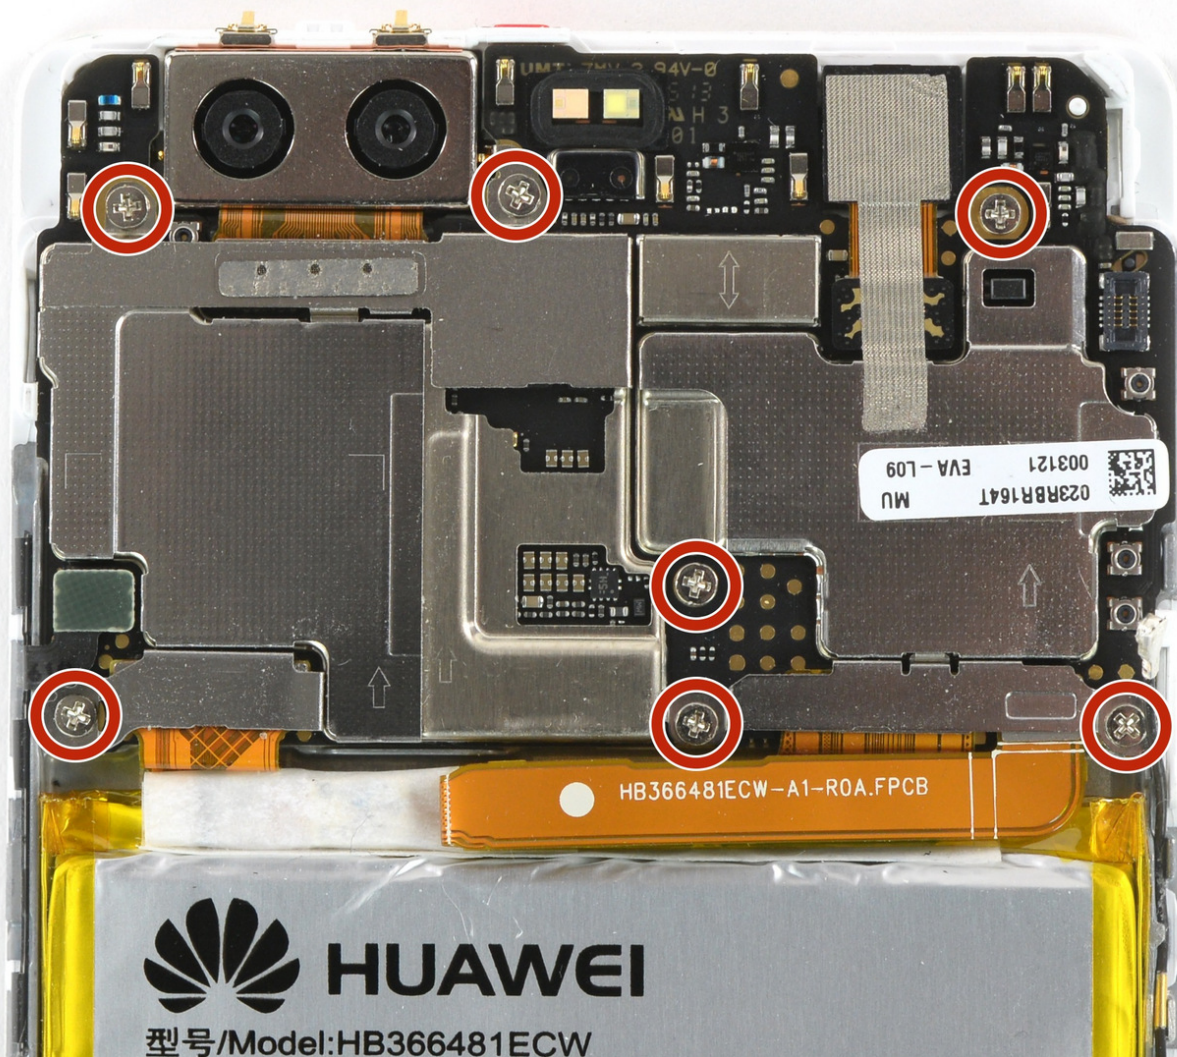

TOOLS:

- [SIM Card Eject Tool](#) (1)
 - [Spudger](#) (1)
 - [Tweezers - Pro/ESD/Angled](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
 - [iSclack](#) (1)
 - [P2 Pentalobe Screwdriver iPhone](#) (1)
-

Step 1 — Back Cover




- First switch off your phone and remove the SIM card tray.
- Unscrew the two Pentalobe P2 screws located at the bottom next to the device's USB C port.
- ⓘ If the screen is cracked you might want to use some tape to protect your eyes from glass shreds and get a better grip to open the phone.

Step 2



- Use an iSclack or a suction handle to separate the display unit from the rear panel.
- ⚠ Don't remove the rear panel completely yet. There is a cable connected to it! It is running from the finger print sensor to the display unit.

Step 3 — finger print sensor

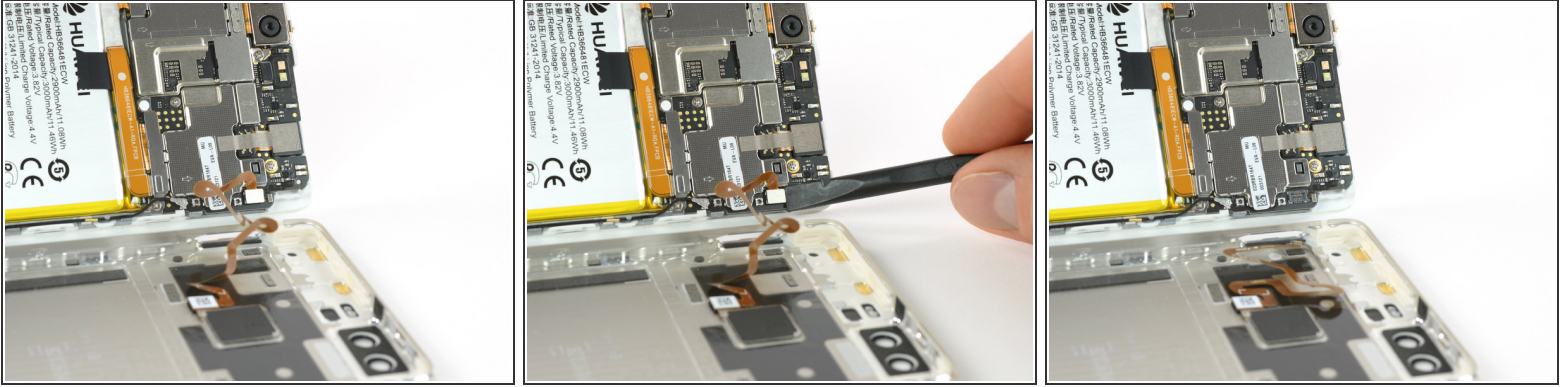


- Disconnect the finger print sensor using a spudger.

Step 4 — Earpiece Speaker



- Loosen the 7 Phillips #000 screws on the motherboard.
- ❗ On one of them might be a water indicator. Remove it.
- Unplug the antenna cable.
- The metal plate covering the battery connector has two little hooks on each side. Use a tweezer to free them and unhinge the plate towards the top.

Step 5

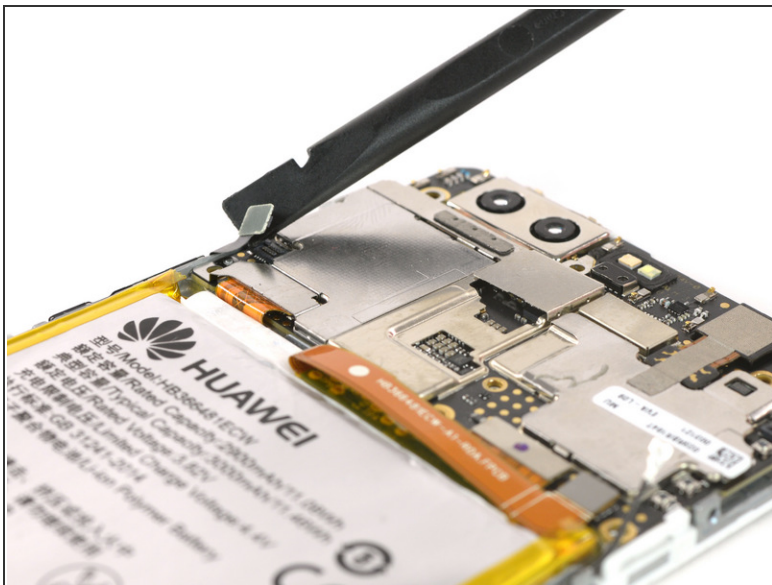


- Disconnect the volume button cable and the display cable ...

Step 6



- ... as well as the battery connector and the cable running to the daughter board.

Step 7

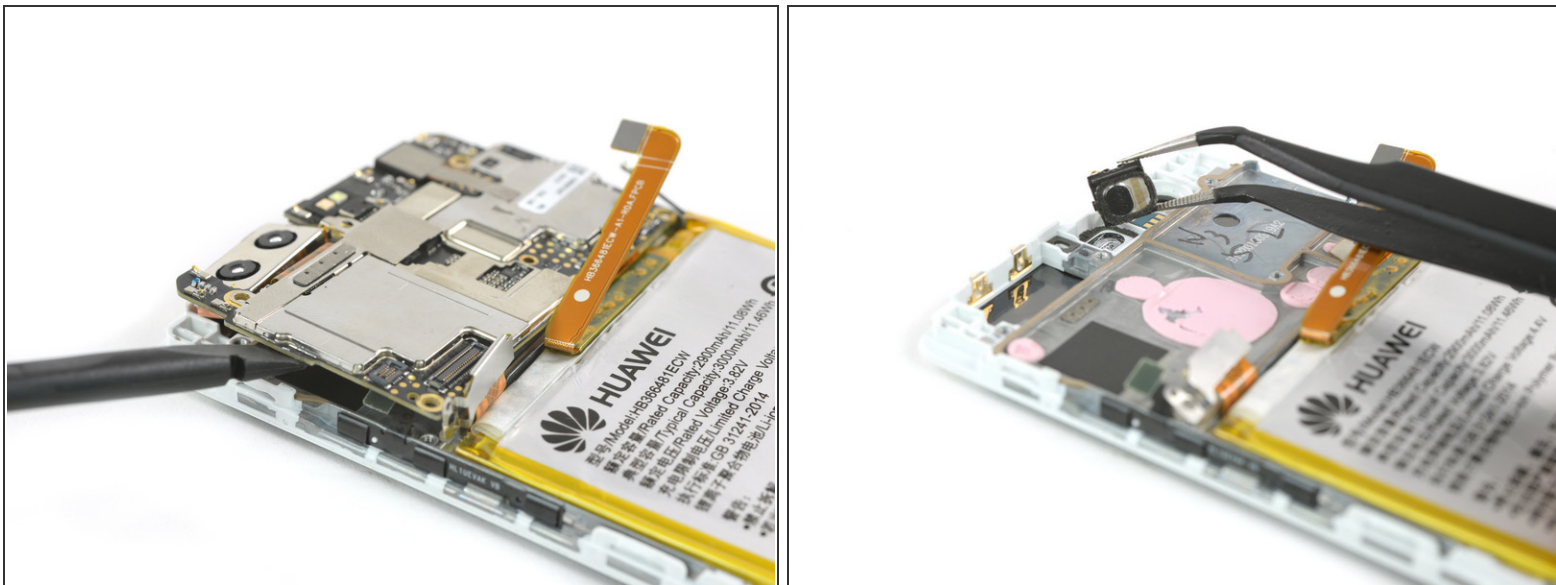

- Now you can lift out the motherboard to access the earpiece speaker.
- ⚠ Be careful with both cameras since they are still connected to the motherboard.
- The earpiece speaker is fixed with an adhesive foam gasket.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-08 04:51:39 AM.